



# MUON RING COOLER FOR THE MUCOOL EXPERIMENT\*

V. Balbekov<sup>†</sup>, S. Geer, N. Mokhov, R.Raja, Z.Usubov, FNAL, Batavia, IL 60510, USA

## Abstract

A possibility to use a ring cooler for the MUCOOL experiment is considered. The cooler is a ring accelerator of about 37 m in circumference consisting of 8 dipole magnets, 4 short solenoids with a field flip of  $\pm 2.5$  T, and 4 long solenoids with adiabatic field 2 – 5 T. The 201.25 MHz linacs provide accelerating gradient 15 MV/min in the long straight sections. Four 1.3 m long liquid hydrogen absorbers are put between the linacs for transverse cooling, and LiH wedge absorbers in the short SS are used for the emittance exchange. To simplify the injection problem,  $\pi - \mu$ -production on an internal target is considered as an option for the MUCOOL experiment.

## 1 INTRODUCTION

The MUCOOL is an experimental program proposed for demonstration of ionization muon cooling and the hardware testing [1]. A possibility to use a ring cooler for the same goal is considered in this paper. The ring cooler has been proposed primarily as a relatively low cost facility for 3-dimensional ionization cooling to produce a single low-emittance bunch for muon collider [2,3]. The scheme described below is based on a high frequency accelerating field and produces many bunches. The later is appropriate for a neutrino factory, but was not acceptable for a muon collider considered in earlier papers.

## 2 DESCRIPTION OF THE COOLER

Schematic layout of the ring cooler and its parameters are given in Fig.1 and Table 1. The cooler consists of 8 dipoles providing a  $45^\circ$  bend each, 4 short straight sections (SS), and 4 long SS. The dipoles have a non-zero gradient to provide focusing in both transverse directions. Solenoids are used to focus the beam transversely in the SS. The axial magnetic field alternates direction in each short SS, where solenoids of a relatively small radius are used to provide rather fast field flip. Lithium-hydride wedge absorbers are placed at a large vertical dispersion in the centers of the short SS. Direction of the field in the long SS is shown in Fig.1. The field grows from edges to center of the long SS to get a low  $\beta$ -function at the center where liquid hydrogen main absorbers are placed. Accelerating cavities are located inside the large-aperture solenoids.

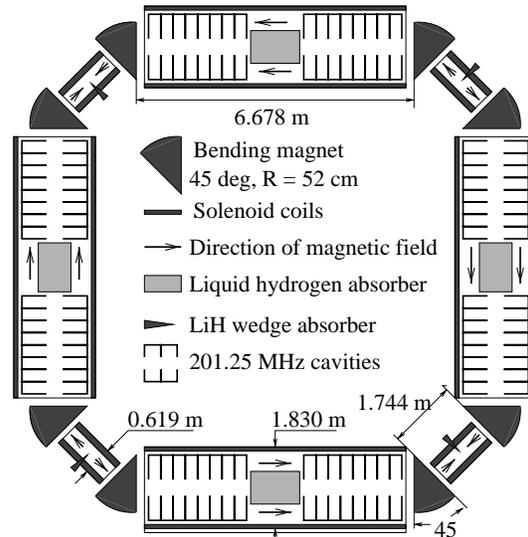


Figure 1: Layout of the ring cooler.

Table 1: Parameters of the ring cooler

Circumference	36.955 m
Nominal energy before/after absorber	270/230 MeV
Bending field	1.453 T
Normalized field gradient	0.5
Maximal axial field of solenoid	5.173 T
Revolution frequency	7.1875 MHz
RF harmonic number	28
Accelerating gradient	15 MeV/m
LH <sub>2</sub> main absorber, length	133 cm
LiH wedge absorber, $dE/dy$	0.75 MeV/cm

### 2.1 Bending Part and Short Straight Section

Besides forming a quasi-circular beam orbit, the bending part should provide a dispersion required for the emittance exchange. The long SS should be dispersion-free, otherwise a particle can find itself at a “wrong” orbit after strong acceleration, resulting in an excitation of betatron oscillations. The dispersion in the “arcs” can be produced in a number of ways using bending magnets of different curvature or bent solenoids [2-3]. In this instance, we use a combination of 2 bending magnets and 2 solenoids with opposite directions of the field. Layout of the SS and its axial magnetic field are shown in Figs. 2 and 3. Note that the bending magnets are considered as perfect magnetic mirrors in calculation of the solenoid field. Transverse field of the bending magnets is introduced analytically including nonlinear part to satisfy Maxwell equations.

Dispersion functions  $D_{x,y}$  of this part is shown in Fig.3. The  $D_x$  is the same in all short SS, while the  $D_y$  changes the sign in each section. Vertical wedge absorbers placed at

\* Work supported by the Universities Research Association, Inc., under contract DE-AC02-76CH03000 with the U. S. Department of Energy.

<sup>†</sup> balbekov@fnal.gov



Table 2: R.m.s. parameters of the beam vs number of turns

Number of turns	0	10	15
Horizontal size (mm)	39.5	16.9	16.4
Vertical size (mm)	40.2	17.8	15.9
Longitudinal size (mm)	88.9	65.4	51.2
Horiz. momentum (MeV/c)	32.4	14.6	13.8
Vertical momentum (MeV/c)	31.9	14.5	13.8
Energy spread (MeV)	31.3	13.4	11.1
Horizontal emittance (mm)	12.1	2.34	2.15
Vertical emittance (mm)	12.1	2.44	2.07
Longitudinal emittance (mm)	26.3	8.31	5.38
3D-emittance (mm <sup>3</sup> )	3856	47.4	24.0
Transmission w/o decay (%)	100	72.2	71.2
Transmission with decay (%)	100	56.3	48.9

significant perturbation of the synchrotron motion. In spite of this, during 10 – 15 revolutions, the longitudinal emittance decreases by a factor of 3 to 4 and the 3D phase volume – by a factor of 100 to 150 with transmission of 50 to 60% (see Table 2).

### 3.2 The Cooler with Internal Target

One of the most serious problems is injection in the ring cooler. Usual way would require applying of a very strong large-aperture fast kicker magnet. Therefore, non-traditional solutions should be considered also. An interesting scheme with fast acceleration/deceleration to inject muons into the ring without kicker was proposed recently in Ref. [4]. A simpler scheme is considered below specifically for the MUCOOL experiment.

A proton beam is directed onto a target placed just in the beginning of a long SS of the ring. Pions generated in the target have a good chance to survive in the SS with a liquid hydrogen target. About 20% of the pions decay generating muons – candidates for the cooling. The key question is a long-term surviving of these muons in the ring with an internal target. First simulation was performed for a 15-cm long *black hole* target, motivated by intensive muon scattering in any high- $Z$  material. The results – almost insensitive to the target length – are presented in Table 3 for several target radii. It seems that a 2.5 mm target looks quite acceptable for cooling demonstration.

These results are confirmed by full Monte Carlo simulations with the MARS code [5]. It turns out that for a 8 GeV Fermilab Booster proton beam with  $5 \times 10^{12}$  ppp, the copper target radius 2.5 mm is optimal both from pion production and target survival standpoints. Fig. 6 shows temperature rise distribution in a 15-cm long copper target after such a

Table 3: Beam parameters after 15 turns vs the target radius

Target radius (mm)	2.5	5	7.5
Horizontal emittance (mm)	2.04	2.03	2.11
Vertical emittance (mm)	2.12	2.08	2.30
Longitudinal emittance (mm)	5.47	5.87	6.58
Transmission w/o decay (%)	58.6	42.8	30.0
Transmission with decay (%)	40.2	29.4	20.6

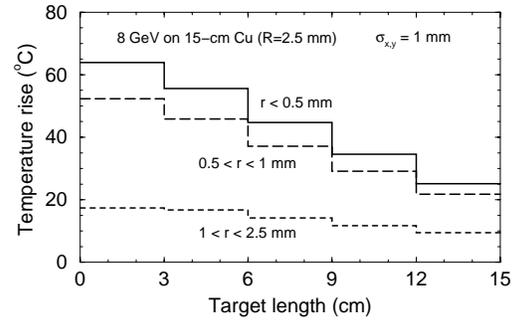


Figure 6: Instantaneous temperature rise in 2.5 mm radius copper target irradiated by a 8 GeV beam of  $5 \times 10^{12}$  ppp.

pulse. The peak  $\Delta T \approx 70^\circ\text{C}$ , the peak energy deposition is 24.8 J/g, and total energy deposited in the target is 183 J. All this is rather encouraging and now requires engineering consideration of a target cooling scheme.

About 0.015 pions of each sign per proton are generated in this target in the interval  $p_t < 100$  MeV/c,  $280 < E < 420$  MeV, approximately corresponding to the cooler acceptance. This gives  $\sim 7.5 \times 10^{10}$  pions with  $\sim 1 \times 10^{10}$  muons at the liquid hydrogen absorber. Pions surviving after the absorber would generate additionally  $\sim 0.5 \times 10^{10}$  muons in the downstream part of the straight section. Approximately a half of all muons falls in the ring cooler acceptance, and taking into account a 30% RF capturing efficiency, the total number of muons in 28 bunches of the cooler is expected to be  $2.5 \times 10^9$ , i.e.  $\sim 10^8$  muons per bunch before and 2.5 times less after the cooling.

## 4 CONCLUSION

It is shown that the high frequency ring cooler is capable to produce 3D muon cooling with a cooling factor of 100-150 and transmission of 50-60%, that is quite suitable for a neutrino factory. Injection/extraction in the ring requires additional studies. Pion/muon production in an internal target is considered also as an option for the MUCOOL experiment. The achievable beam emittance and cooling factor are approximately the same in this case, but the transmission falls to 30-40% .

## 5 REFERENCES

- [1] MUCOOL Proposal: Ionization Cooling R&D Program for a High Luminosity Muon Collider, Fermilab proposal 204.
- [2] V.I.Balbekov and A.Van Ginneken, “Ring Cooler for Muon Collider”. In the book “Physics Potential and Development of  $\mu^+ \mu^-$  Colliders”. AIP Conf. Proc. 441, p.309 (1997).
- [3] V.Balbekov, “Possibility of Using a Ring Accelerator for Ionization Cooling of Muons”. PAC1999, V.1, p.315.
- [4] D.Neuffer, “Injection and/or Extraction and a Ring Cooler”. Fermilab Mucool Note 211, June 2001.
- [5] N. V. Mokhov, “The MARS Code System User’s Guide”, Fermilab-FN-628 (1995); N. V. Mokhov and O. E. Krivosheev, “MARS Code Status”, Fermilab-Conf-00/181 (2000). <http://www-ap.fnal.gov/MARS/>.